



### Main

Range of product	Modicon Quantum automation platform
Product or component type	Analogue input module
Type of filter	Single pole low pass - 3 dB at 20 Hz Notch filter - 3 dB at 50/60 Hz

Company: Joyoung International Trading Co., Limited  
Attn: Smiling  
Mobile/WhatsApp/Wechat: +86 18050035902  
Email: info@htechplc.com  
Website: <https://www.joyoungintl.com/>

### Complementary

Analogue input number	8
Addressing requirement	10 input words
Analogue input type	Thermocouple - 50...1665 °C thermocouple S Thermocouple - 50...1665 °C thermocouple R Thermocouple - 270...400 °C thermocouple T Thermocouple - 270...1370 °C thermocouple K Thermocouple - 270...1000 °C thermocouple E Thermocouple - 210...760 °C thermocouple J
Analogue input resolution	16 bits
Input impedance	> 1 MOhm
Absolute accuracy error	+/- 4 °C plus + 0.1 % of reading thermocouple S +/- 4 °C plus + 0.1 % of reading thermocouple R +/- 2 °C plus + 0.1 % of reading thermocouple T +/- 2 °C plus + 0.1 % of reading thermocouple K +/- 2 °C plus + 0.1 % of reading thermocouple J +/- 2 °C plus + 0.1 % of reading thermocouple E
Linearity error	1 °C, 0.1 °C, 1 F, 0.1 F - 50...1665 °C 1 °C, 0.1 °C, 1 F, 0.1 F - 270...400 °C 1 °C, 0.1 °C, 1 F, 0.1 F - 270...1370 °C 1 °C, 0.1 °C, 1 F, 0.1 F - 270...1000 °C 1 °C, 0.1 °C, 1 F, 0.1 F - 210...760 °C
Accuracy drift according to temperature	0.15 µV/°C + 0.0015 % of reading/°C max low level voltage
Common mode rejection	>= 120 dB 50/60 Hz
Isolation between channels and bus	2500 V DC for 60 s 1780 V AC for 60 s
Isolation between channels	220 V AC 300 V DC
Update time	1000 ms
Fault type	Overtacking scale Broken wire
Marking	CE
Cold junction compensation	Internal 0...60 °C
Local signalling	8 LEDs red channel fault 8 LEDs green channel is turned on 1 LED red external fault 1 LED green bus communication is present (Active)
Bus current requirement	280 mA
Power dissipation in W	1.5 W

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Module format	Standard
Product weight	0.3 kg

## Environment

Standards	CSA C22.2 No 142 UL 508
Product certifications	CUL FM Class 1 Division 2
Resistance to electrostatic discharge	8 kV on air conforming to IEC 801-2 4 kV contact conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...1000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

## Offer Sustainability

Sustainable offer status	Green Premium product
RoHS	Compliant - since 0901 - <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available <a href="#">Download Product Environmental</a>
Product end of life instructions	Need no specific recycling operations

## Contractual warranty

Period	18 months
--------	-----------

Racks for Modules Mounting


Dimensions of Modules and Racks



- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

Thermocouple Input 8-Channel Module

Wiring Diagram

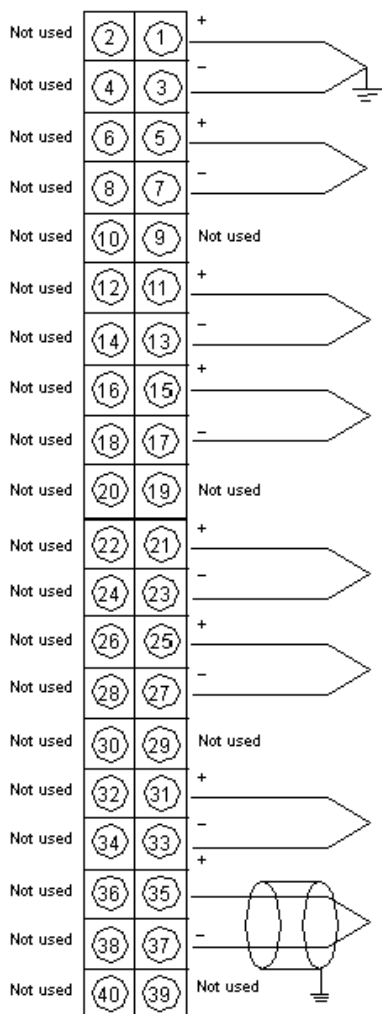

Using Cold Junction Compensation (CJC)

For temperature measurements, the module provides an internal CJC. However, a remote CJC can be used with the following TC types: J,K and T. The TC must be connected to Channel.

